



## Request for Proposal Site #41 Disaster Repairs

### General Specifications:


The following must be specified in the proposal and will be the responsibility of the contractor

- Price of material per yard
- Price of hauling material
- Each piece of Intended equipment to be utilized to be specified
- Specific equipment rate for each piece of equipment to be utilized
- Hours of use separately recorded for each piece of equipment specified.
- Up to 24 yards of 200-300 rip rap supplied by the contractor
- Up to 50 yards 250-450 rip rap of supplied by the contractor
- Up to 25 yards 1-3 inch stone supplied by the contractor if necessary after site visit
- Locates including MTS, Gas, Hydro, Cable, Oil, etc. are the contractors responsibility
- **Completion Date: October 1, 2025** unless otherwise agreed to by the Municipality. A penalty may be applied at a rate of \$50/day until the work is complete.

**Required Repairs:** Located at NE 17-16-15 WPM. Place up to 12 yards of 200-300 rip rap on both the NE and SE downstream bank. Place up to 25 yards of 250-450 rip rap on both the NW and SW upstream bank. Place up to 25 yards of 1-3 inch stone on crossing area

NOTE: meeting with Public Works to explain this site will be required prior to project commencement

### Sketch of Damaged Area:

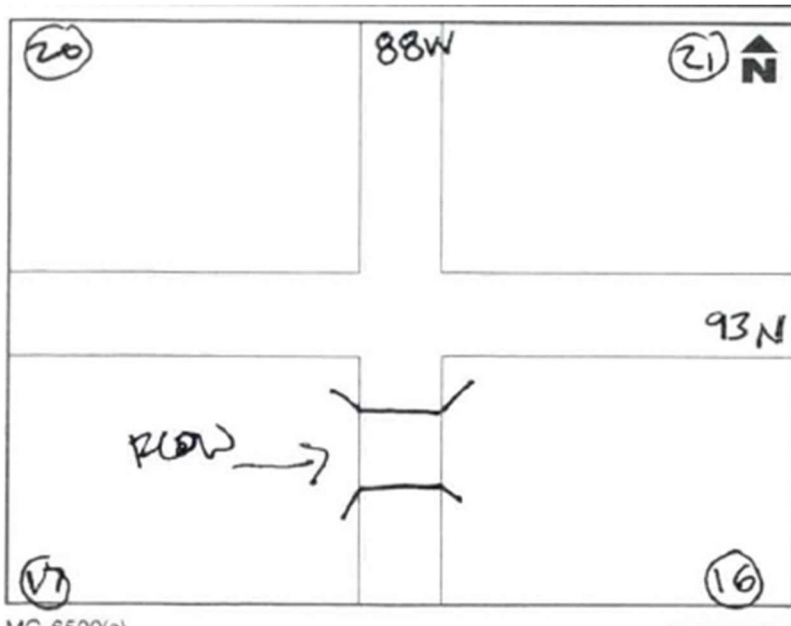



The lowest or any proposal may not necessarily be accepted and the Municipality reserves the right to reject any or all proposals, to waive defects, or to accept and offer which may be considered in the best interests of the Municipality. The Municipality, in its entire discretion may reject or accept all or any part of the proposal or any of the proposals submitted under this proposal call.

Contractors awarded tenders will be required to supply information related to day(s) work is complete, hours of work per day, equipment utilized per day, (separated by equipment type) ideally on invoices issued.

Contractors must notify the RM office of the intended commencement date of repairs and expected duration as well as actual commencement date.

Completion of work expected as per tender and quoted amounts. Overages will not be accepted unless approved in writing by the RM of Rosedale prior to performance of work and/or prior to additional materials being utilized.

**RFP to be submitted via email, mail, fax or in person on or prior to June 10, 2025 at 4:00 p.m. Any questions related to the specifications please contact the municipal office at 204-476-5414.**

Rural Municipality of Rosedale  
Attention: Melissa McDonald  
Box 100, Neepawa, MB, R0J 1H0  
Email: [admin@rmrosedale.com](mailto:admin@rmrosedale.com)  
Fax: 204-476-5431